
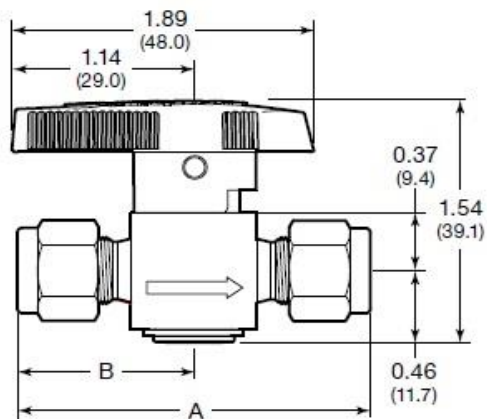
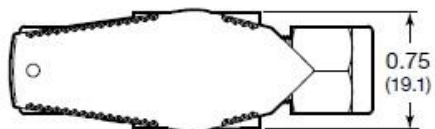


Max Temp	-10 to 100F	150F	200F
Working Pressure	3000	3000	3000

C _v	1.6
Air Flow	18 scfm @ 10 psi

Materials of Construction

1	Handle	Polyetherimide
2	Pin	316 SS
3	Plug	PTFE coated 316 SS
4	O-rings	PTFE coated Fluorocarbon FKM
5	Pin	316 SS
6	Body	316 SS
7	Snap Ring	PH 15-7 Mo SS
	Lubricant	Food Grade Silicone

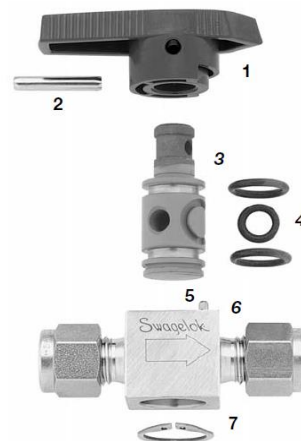

MICROPURE® FILTRATION

Date: 5/21/2014
Scale: NTS

Drawing

CDK-ALL