


ALL DIMENSIONS ARE FOR REFERENCE ONLY. OBTAIN A CERTIFIED DRAWING FROM THE FACTORY PRIOR TO USING DIMENSIONS FOR DESIGN PURPOSES.

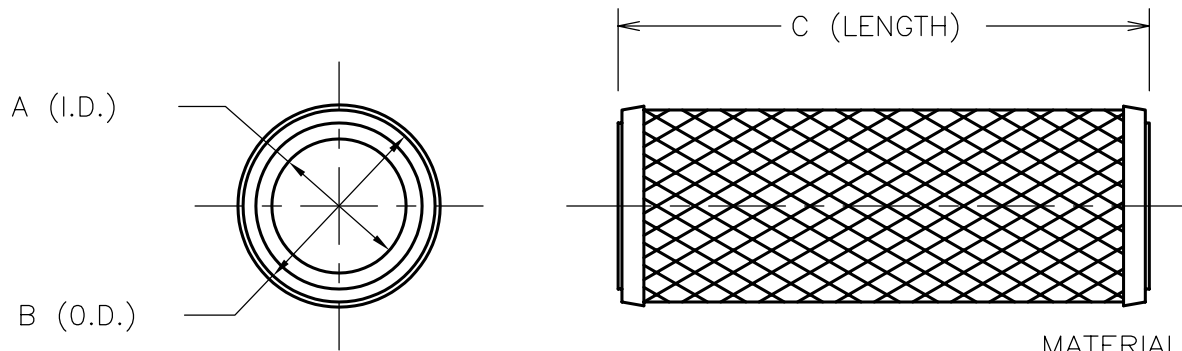

SYM	ECN	DATE
A	6371	7-28-03
B	7065	1-20-05

MATERIALS OF CONSTRUCTION

MEDIA: BOROSILICATE GLASS/EPOXY

RETAINER: PLATED CARBON STEEL

DRAIN LAYER: POLYESTER/RAYON (A)

HANDLING NET: POLYPROPYLENE

ENDSEALS: POLYURETHANE RUBBER

FLOW DIRECTION: IN TO OUT

MAXIMUM PEAK TEMPERATURE: 225°F

MAXIMUM OPERATING TEMPERATURE: 175°F

✓	ELEMENT TYPE	A ± .03	B REF	C
CFCC-24-X01-DU				
	<input checked="" type="checkbox"/>	2.14 DIA	3.06 DIA	23-1/2 ± 1/8

✓	GRADE	COALESCING EFF. (%) RATING	OIL CARRYOVER (PPM _W) ⁽¹⁾	RATED FLOW SCFM AT 100 PSIG (SCFM/IN ²)	NOMINAL PRESSURE DROP AT RATED FLOW (PSID)	
					DRY	WET
	2	99.999+	.001	1.8	1.50	5-8
	4	99.995	.003	2.5	1.25	4-6
✓	6	99.97	.008	3.3	1.00	3-5
	8	98.5	.200	4.5	0.50	2-3
	10	95	.830	5.5	0.50	1-2

(B) (1) TESTED PER ANSI/CAGI ADF-400 AT 40 PPM_W OIL INLET.
DOES NOT INCLUDE VAPORS.

SPEC SHEET COMPLETED BY _____ DATE _____

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE

DR BY	DNH	DATE	1-21-94
CHK BY		SCALE	NTS

DRAWING No.

CFCC-24-X01-DU

SIZE
A