


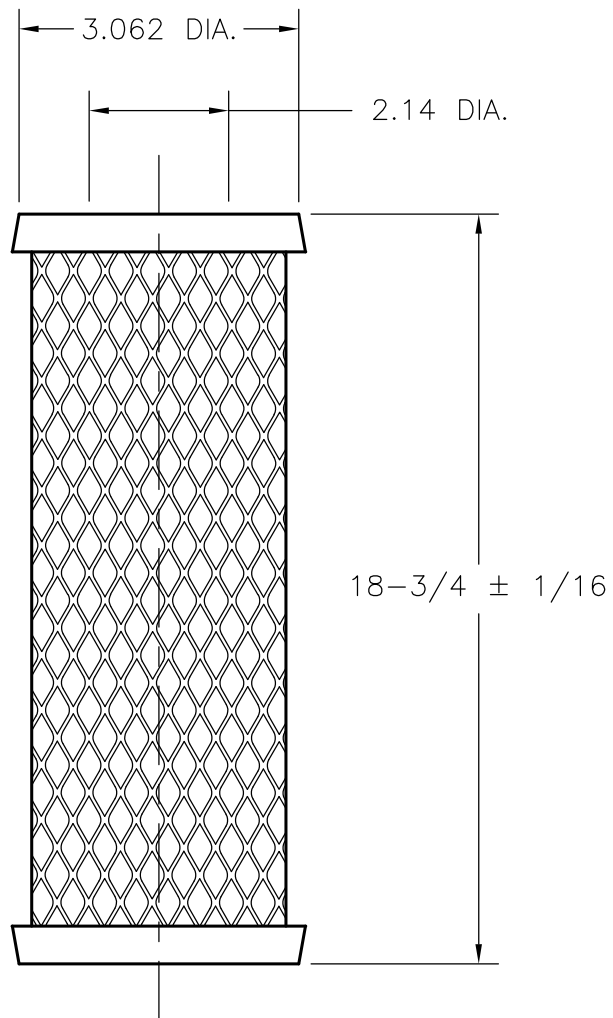

SPECIFICATIONS:

MODEL NUMBER: CG19-25-DU

RATED FLOW RATE 450 SCFM @ 1.0 PSID, 100 PSIG PRESSURE.

OIL VAPOR REMOVAL EFFICIENCY: +99%

FLOW DIRECTION: ANY

MOUNTING: VERTICAL

MAXIMUM OPERATING TEMPERATURE: 175° F.

MATERIALS: ACTIVATED CARBON, RAYON, POLYURETHANE,
POLYPROPYLENE AND POLYESTER.

TITLE		DR BY MRD		DATE 9-24-09	 MICROPURE® FILTRATION	ALL DIMENSIONS $\pm 1/4"$ UNLESS OTHERWISE NOTED.	DRAWING No. CG19-25-DU-300	SIZE A
		SPECIFICATION DRAWING		SCALE NTS				