

SYM	ECN	DATE
—	— — — —	2-12-13

SPECIFICATIONS:

MODEL NUMBER: FMT-10-S20

DRY FLOW RATE 51 SCFM @ 1.5 PSID, 100 PSIG PRESSURE.

COALESCING EFFICIENCY: 99.997% @ (.01-.10 microns)

FLOW DIRECTION: Bi-Directional

REPLACEMENT DIFFERENTIAL PRESSURE: 10 PSID

MAXIMUM DIFFERENTIAL PRESSURE: 30 PSID


WEIGHT: 1 ounce

SURFACE AREA: 7075 cm^2

MOUNTING: Between Segmented Discs

MAXIMUM OPERATING TEMP: 225 F

MATERIALS: PTFE

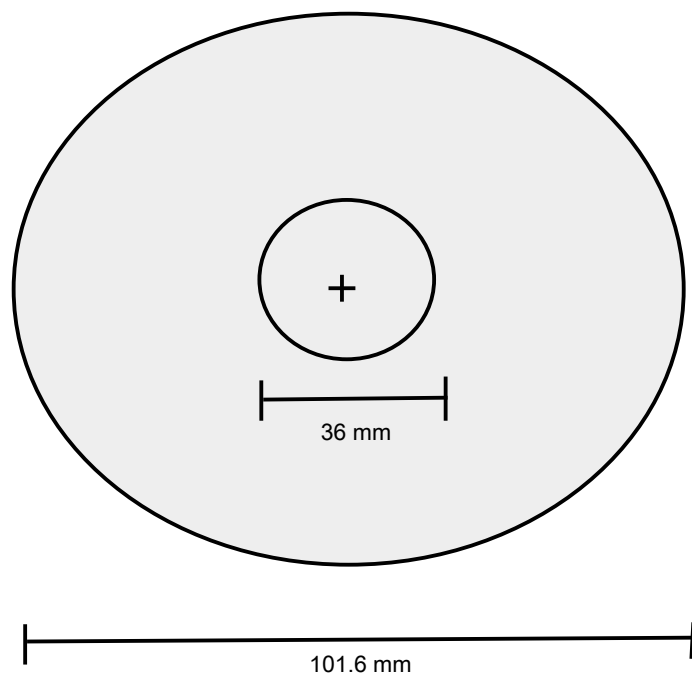

MICROPURE®
FILTRATION

ALL DIMENSIONS +/- 1/4"
UNLESS OTHERWISE NOTED.

TITLE	DR BY	DATE	DRAWING No.	SIZE
	CHK BY	SCALE		
SPECIFICATION DRAWING		2-12-13 NTS	FMT-10-S20	