


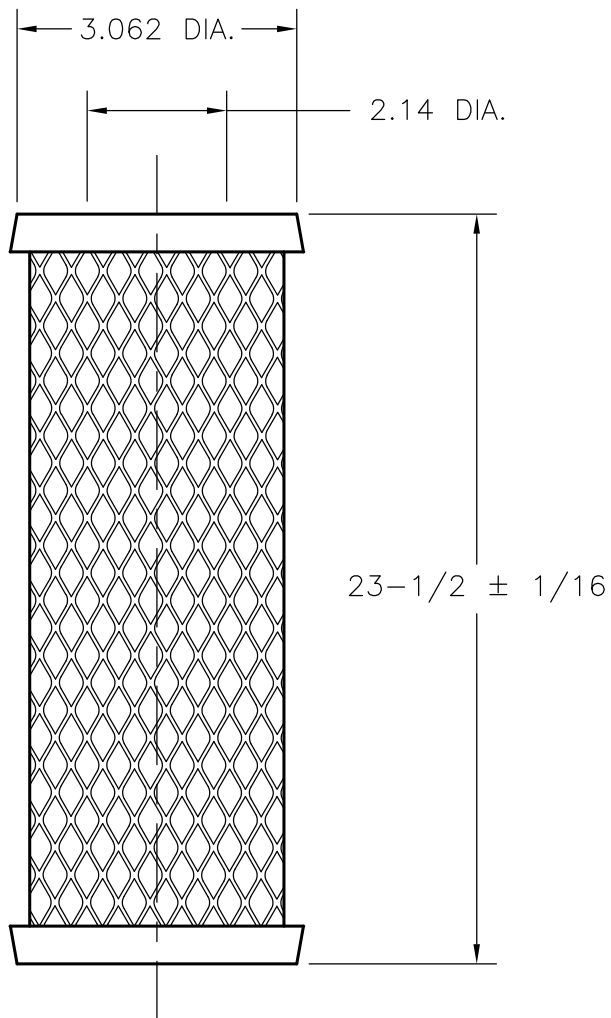

SPECIFICATIONS:

MODEL NUMBER: SG24-25-DU-2X

RATED FLOW RATE 625 SCFM @ 1.0 PSID, 100 PSIG PRESSURE.

OIL VAPOR REMOVAL EFFICIENCY: +99%

FLOW DIRECTION: ANY

MOUNTING: VERTICAL

MAXIMUM OPERATING TEMPERATURE: 175° F.

MATERIALS: ACTIVATED CARBON, RAYON, POLYURETHANE,
POLYPROPYLENE AND POLYESTER.

TITLE SPECIFICATION DRAWING		DR BY MRD	DATE 9-28-09	DRAWING No. SG24-25-DU-2X-300	SIZE A
		CHK BY	SCALE NTS		
				 MICROPURE® FILTRATION	ALL DIMENSIONS $\pm 1/4"$ UNLESS OTHERWISE NOTED.